

Canvas

Tessuto / Fabric Cat. D

Composizione/ Composition

90% WW
10% PA

Abrasione/Abrasion (Martindale)

100.000 cicli/cycles
EN ISO 12947-2

Pilling

4 EN ISO 12945-2

Solidità colori alla luce Colour fastness to light


5/6 EN ISO 105 B02

Solidità colori allo sfregamento Colour fastness to rubbing


secco _ dry: 4/5
umido _ wet: 4/5
EN ISO 105 X12

Resistenza al fuoco/Flame Retardant


AS/NZS 1530.3 ▪ BS 5852-1 ▪ EN 1021-1/2
▪ IMO FTP Code 2010 Part 8 ▪ NF D 60-013 ▪
NFPA 260, class 1 ▪ ÖNORM B1/Q1 ▪ UNI 9175
1IM ▪ US Cal. TB 117-2013

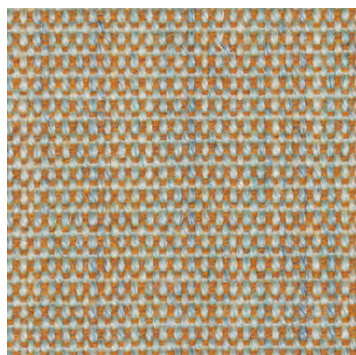


CNV 244

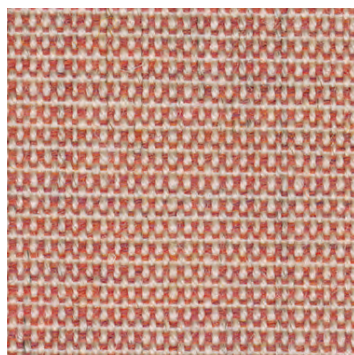


CNV 614

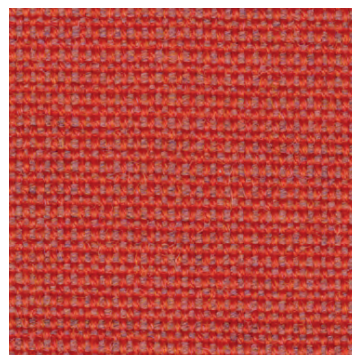


CNV 644

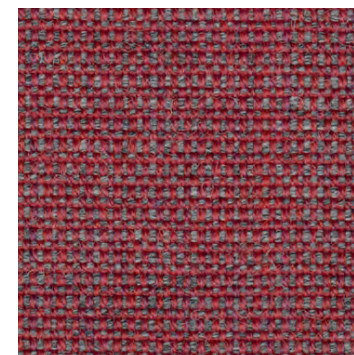


CNV 654

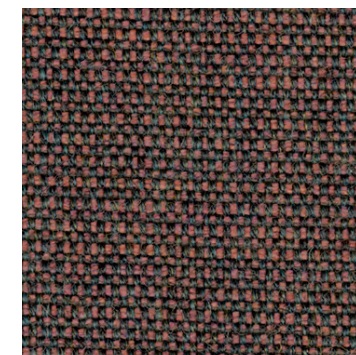


CNV 674

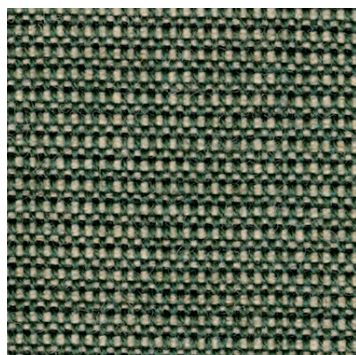


CNV 926

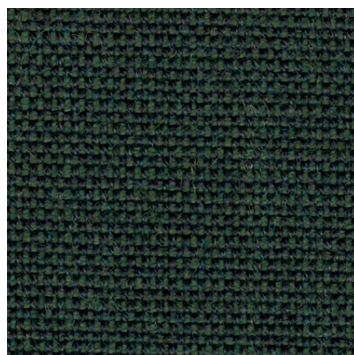


CNV 996

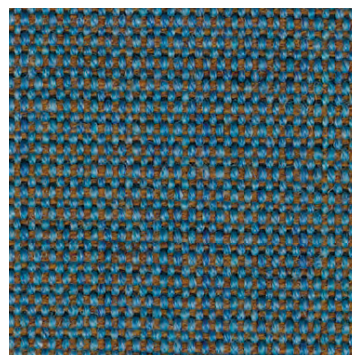

CNV 734

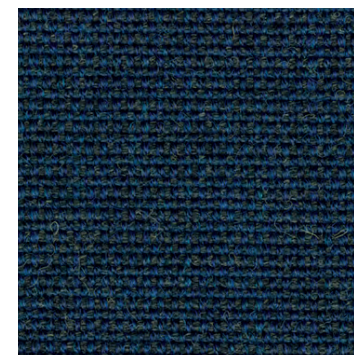

CNV 794

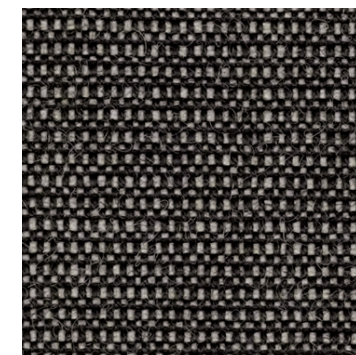

CNV 154

Disponibile su richiesta in 45 colori
Scheda tecnica completa > [clicca qui.](#)

Available on demand in 45 colours.
Complete technical schedule > [click here.](#)

cizeta